China

bythai

BT203

SGS ISO

## Tianjin China Ringlock System All Accessories Galvanized Steel /Aluminium **Ringlock Scaffolding System for Aerial Work**

#### **Basic Information**

• Place of Origin:

**BY THAI** 

- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 1000
- Price: 10.8-85.5
- Packaging Details: container
- Delivery Time: 10-15
- Payment Terms: L/C, T/T



#### **Product Specification**

- Material:
- Safety:
- Cost-Effectiveness:
- Design Style:
- Assembly Method:
- Components:
- Standard:
- Advantages:
- Connection Type:
- Warranty:
- Shipping Origin:
- Application Scenarios:
- Highlight:

Industrial Quick And Easy

Q235/Q345 Steel

Highly Stable And Secure Affordable And Efficient

- Verticals, Horizontals, Diagonals, Ledgers, Transoms, Base Jacks, U-head Jacks, Braces, Etc.
- EN12810/EN12811
- High Strength, Easy Assembly, Versatile,
- Ringlock
- 2 Years China

Architecture

- Tianjin China Ringlock Scaffolding System, Galvanized Steel Ringlock Scaffolding System,



### More Images




# Tianjin China Ringlock System All Accessories Galvanized Steel /Aluminium Ringlock Scaffolding System for Aerial Work

Ring-Lock Scaffolding System consists of hot dipped galvanized steel pie and modular components that are assembled together using integral wedge connectors. Ring-Lock system is a modular scaffold system which can provide major saving in labor cost while meeting the demands for safety, ease of handling and reductions in maintenance. Components: Ring-Lock Standard With Spigot, Ring-Lock Ledger, Ring-Lock Diagonal, Wedge Pin, Base Collar, Steel Plank, Steel Stair Case.

1.Material	Q345B
2.Diameter	60&48mm
3.Thickness	3.2mm
4.Surface	HDG/Painted/Power Coated
5.Length	250mm,500mm, 1000mm, 1500mm, 2000mm, 2500mm
6. Processing	Cutting off, welding, shaping, Cutting off, welding, shaping
7.Function	Main stressed part of scaffolding Adding inner fittings on the upper end to increase height of scaffold



Model NO.	Ring lock Scaffolding
Supporting Mode	Floor Type Scaffolding
Lapping Form	Cross Ring Scaffolding
Erection Position	External Scaffolding
Move Method	Horizontal mobile Scaffolding
Scaffolding Part Type	Scaffolding Props
Construction Properties	Building Scaffold
Height	250-3000
Certificated	SGS
Texture	Q345/Q235/Q195

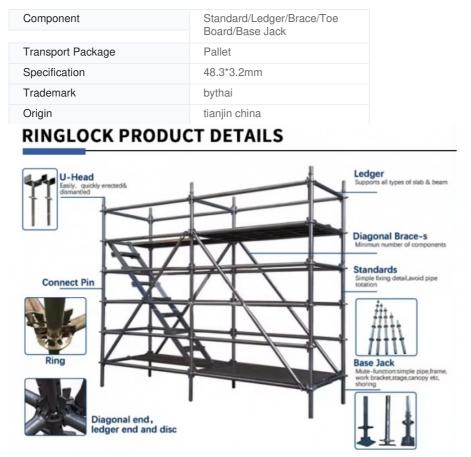

Connection accessories: Connection accessories include bolts, nuts and bolt hooks, which are mainly used to connect vertical poles, horizontal poles and diagonal tie rods to ensure that they can be firmly connected together to build a strong scaffolding structure.

5. Safety handrails and guardrails: These accessories are used to provide workers with safety on scaffolding and prevent them from accidentally falling or being injured. Safety handrails and guardrails are often installed at the edges and openings of scaffolding.

